CMC S15
SPIDER LIFT

APA
ACCESS PLATFORMS ABERDEEN

200KG
Lift Capacity

14.90M
Working Height

6.90M
Horizontal Outreach

cmc
UNITED KINGDOM




Compact tracked spider lift for tight access areas, delivering strong height, outreach and stability on uneven or sensitive ground conditions.

[BENEFITS]

- Simple to use
- The most compact dimensions of any spiderlift in this height range, including a very small stabiliser footprint
- Versatile
- Service friendly
- Towable
- Transportable
- Range of power options

[TECHNICAL DATA]

WORKING HEIGHT	14.90 m
LIFT CAPACITY	200 kg
HORIZONTAL OUTREACH	6.90 m
TOTAL LENGTH - WITHOUT BASKET	3.48 m
TOTAL LENGTH - WITH BASKET	4.12 m
HEIGHT IN TRAVEL POSITION	1.97 m
WIDTH WITH BASKET REMOVED	0.78 m
BASKET DIMENSIONS (H X L X W)	1.10 x 1.40 x 0.70 m
GROUND CLEARANCE	0.38 m
STABILISER BASE (W X L)	2.70 x 2.70 m
STABILISER FOOT DIAMETER	0.18 m
JIB MOVEMENT	90°
TURRET ROTATION	356°
MAX SLOPE TO STABILISE	12 %
MAX TRAVEL SLOPE	30 %
MAX APPROACH ANGLE	23 %
MAX SIDE SLOPE TO TRAVEL	10 %
MAX TRAVEL SPEED	1.1 km/h
GROSS WEIGHT WITH HONDA	1 955 kg
GROSS WEIGHT WITH KUBOTA	2 055 kg
MAX PRESSURE ON STABILISER FOOT	4.54 kg/cm^2
MAX PRESSURE ON TRACKS	0.21 kg/cm^2
TRAFFIC LOAD IN TRAVEL POSITION	312 kg/m^2
TRAFFIC LOAD IN WORKING POSITION	246 kg/m^2

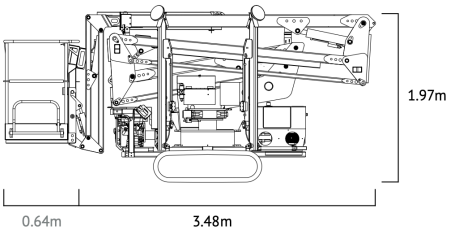

[STANDARD FEATURES]

- User friendly with intuitive 4-step operation from start to working at height
- Simple operating system with fault code diagnosis and easy to repair on-site
- Low weight and very compact, so suitable to tow on a trailer behind mid-size vans and 4x4s
- Articulating boom with telescope and jib, plus innovative basket design offers unrivaled performance
- Single doorway width (780 mm)
- Hydraulic extending tracks

[OPTIONS AND ACCESSORIES]

- Optional Kubota diesel engine
- Optional dual voltage AC motor