H15 SX
DIESEL SCISSOR LIFT

APA
ACCESS PLATFORMS ABERDEEN

500KG
Lift Capacity

15.00M
Working Height

13.00M
Platform Height

Haulotte GROUP




Robust diesel scissor lift offering increased height and strong load capacity, designed for demanding outdoor construction and uneven terrain.

[BENEFITS]

- Exceptional rough terrain capability
- Hydraulic differential lock for improved RT capability
- 35cm ground clearance ensures exceptional rough terrain performance
- 4 wheel drive
- Excellent manoeuverability
- Tight turning radius
- Proportional controls for extremely smooth movements

[TECHNICAL DATA]

WORKING HEIGHT	15 m
PLATFORM HEIGHT	13 m
DRIVE HEIGHT	10 m
LIFT CAPACITY	500 kg
A EXTENDED PLATFORM LENGTH	6 m
PLATFORM EXTENSION LENGTH	1 m
B WIDTH	2.25 m
C HEIGHT - STOWED	2.77 m
STORAGE HEIGHT	1.91 m
D WHEELBASE	2.75 m
E GROUND CLEARANCE	35 cm
F PLATFORM WIDTH	1.89 m
G PLATFORM LENGTH	4 m
H LENGHT	4.12 m
RAISE/LOWER TIME	46/57 sec
NUMBER OF EXTENSIONS	2
TURNING RADIUS - OUTSIDE	4.96 m
DRIVE SPEED	1.6 - 6 km/h
GRADEABILITY	40 %
TYRES - FOAM FILLED	10-16.5
ENGINE	23.1 kW - 31 Hp
HYDRAULIC CAPACITY	100 l
WEIGHT	6 340 kg

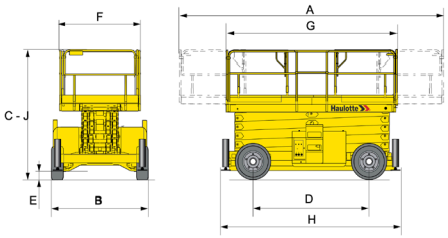

[STANDARD FEATURES]

- 4 wheel drive (2 wheel steer)
- 5° tilt alarm
- 2 metres of platform extension
- Platform Load Management System
- 12 V - 95 Ah batteries
- 14 V - 50 A alternator
- Removable operator's control box
- Free wheeling device
- Hourmeter
- Horn
- Towing and lifting hooks
- Hydraulic brakes
- Centralised stabiliser (H18 SX)
- Manual emergency lowering system

[OPTIONS AND ACCESSORIES]

- Rotating beacon
- Travel alarm
- Power to platform
- Working light
- Encoded starting device
- Biodegradable hydraulic oil
- Motion alarm for movements and translation
- Non-marking tyres
- Warm Environment Kit
- Centralised outrigger control with automatic levelling (standard on H18SX)