HA16 RTJ PRO
DIESEL BOOM LIFT

APA
ACCESS PLATFORMS ABERDEEN

230KG
Lift Capacity
2 (pers.)

16.00M
Working Height

8.30M
Horizontal Outreach

Haulotte GROUP




Rough terrain articulated boom lift offering increased height and outreach with strong stability for demanding external construction environments.


[BENEFITS]

- Performance & ease of use
- Industry leading working envelope with an outreach of 8.3 m
- Best lifting speed of 40 sec
- Fully proportional and simultaneous movements
- 4-wheel steer and 360° continuous rotation for a greater productivity
- Excellent robustness
- Rugged hoods with ergonomic handle
- Long lasting structural design
- Easy maintenance
- Fully modular basket with upper control box cover
- Easy access to all components
- Self-diagnosis tool on lower control box
- Best comfort and safety feeling
- Safe driving
- Haulotte Activ'Shield© Bar

[TECHNICAL DATA]

WORKING HEIGHT	16 m
PLATFORM HEIGHT	14 m
HORIZONTAL OUTREACH	8.30 m
UP AND OVER CLEARANCE	7.65 m
LIFT CAPACITY	230 kg (2 pers.)
A LENGTH - STOWED	6.75 m
B WIDTH	2.30 m
C HEIGHT - STOWED	2.30 m
D WHEELBASE	2.10 m
E GROUND CLEARANCE	38 cm
F X G PLATFORM SIZE	1.83 x 0.80 m
H LENGTH - TRANSPORT	5.05 m
I HEIGHT - TRANSPORT	2.40 m
VERTICAL JIB ROTATION	140° (-80°/+60°)
JIB LENGTH	1.20 m
PLATFORM ROTATION	165° (-75°/+90°)
TURNTABLE ROTATION	360° continuous
TURNING RADIUS - OUTSIDE	3.75 m
TILT	5 °
DRIVE SPEED	Up to 5.6 km/h
GRADEABILITY	40 %
TYRES - SOLID ROUGH TERRAIN	14x17.5
POWER SOURCE	Kubota 26 kW - 35 hp
HYDRAULIC CAPACITY	76 l
FUEL CAPACITY	62 l
WEIGHT	6 650 kg

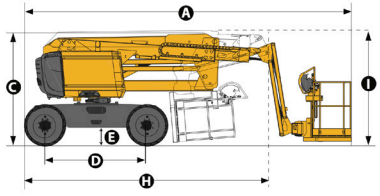

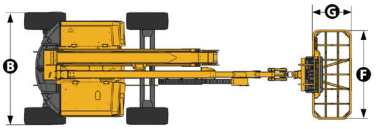

[STANDARD FEATURES]

- 4 wheel drive and 4 wheel steer
- Front oscillating axle increases stability on uneven ground
- Permanent limited slip differential
- 230 kg (2 persons) load capacity
- 4 simultaneous movements for maximum productivity
- Safe to use in winds up to 60km/h - 37mph
- Rotating beacon
- Modular standard basket 1.83 m x 0.80 m, quick and easy to repair
- Drop bar entry gate
- Upper control box cover and tool tray
- AC power to platform (110/230V)
- Self-diagnosis tool on lower control box
- Swing out engine tray for ease of maintenance
- Hour meter
- Low fuel level indicator (upper & lower control boxes)
- Engine pre-heater with light indicator
- Sound and light alarm for tilt and load
- 12 V battery / electrical control system
- Electric pump system and emergency descent
- Travel alarm
- Haulotte Activ'Shield© Bar : Exclusive secondary guarding device (Europe only)

[OPTIONS AND ACCESSORIES]

- Modular large basket 2.44 m x 0.91 m quick and easy to repair
- Lateral swing door entry gate
- Hydraulic generator Dynaset 3.5Kw
- Air-line to platform 6.5 mm inner diameter
- 70W working light
- Power to platform (Female plug in the basket with or without circuit-breaker 30mA)
- Flashing light
- Cold weather kit : -10°C /-25°C
- Hot weather kit : hydraulic oil cooler + hydraulic oil
- Biodegradable hydraulic oil
- Large cured on solid Rough terrain tires 385/65
- Non-marking tires 14x17.5
- Catalytic exhaust for diesel engine
- Spark arrestor and electric one-way valve
- Battery cut-off