HA20 RTJ PRO
DIESEL BOOM LIFT

APA
ACCESS PLATFORMS ABERDEEN

230KG
Lift Capacity

20.60M
Working Height

12.20M
Horizontal Outreach

Haulotte GROUP




High-reach diesel boom lift providing extended outreach and robust terrain capability for large-scale construction and industrial access work.

[BENEFITS]

- Performance & ease of use
- Best lifting speed of 48 sec.
- Industry leading working envelope with an outreach of 12.2 m
- Fully proportional and simultaneous movements
- Ease of transport
- Excellent robustness
- Rugged hoods with ergonomic handle
- Long lasting structural design
- Easy maintenance
- Exclusive modular basket with upper control box cover and tool tray
- Easy access to all components
- Self-diagnosis tool on lower control box
- Best comfort and safety feeling
- Haulotte Activ'Shield™ Bar (for Europe + Latin America only)

[TECHNICAL DATA]

WORKING HEIGHT	20.60 m
PLATFORM HEIGHT	18.60 m
HORIZONTAL OUTREACH	12.20 m
UP AND OVER CLEARANCE	8.40 m
LIFT CAPACITY	230 kg
A LENGTH - STOWED	8.80 m
B WIDTH	2.42 m
HEIGHT - STOWED	2.51 m
C HEIGHT - TRANSPORT	2.93 m
D WHEELBASE	2.45 m
E GROUND CLEARANCE	42 cm
F X G PLATFORM SIZE	1.83 x 0.80 m
H LENGTH - TRANSPORT	6.50 m
VERTICAL JIB ROTATION	140° (+60°/-80°)
PLATFORM ROTATION	180° (+90°/-90°)
TURNTABLE ROTATION	360° continuous
TAILSWING	14.20 cm
TURNING RADIUS - OUTSIDE	3.75 m
TILT	5 °
DRIVE SPEED	0,5 - 5 km/h
GRADEABILITY	45 %
TYRES - SOLID ROUGH TERRAIN	385/65-22,5
POWER SOURCE	Kubota 36.5 kW - 49.5 hp
WEIGHT	9 600 kg

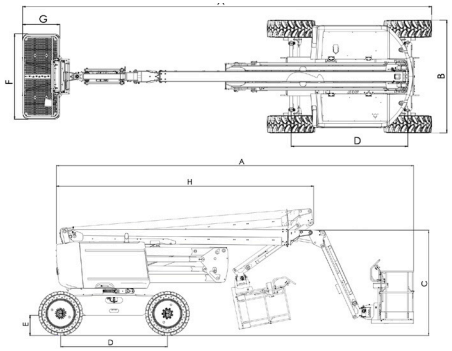

[STANDARD FEATURES]

- 4 wheel drive, 4 wheel steer
- Front oscillating axle increases stability on uneven ground
- Safe to use in winds up to 60 km/h - 37mph
- 4 simultaneous movements for maximum productivity
- 230 kg / 500 lbs (2 persons) load capacity unrestricted working envelop
- Permanent limited slip differential
- Rotating beacon
- Modular standard basket 1.83 m x 0.80 m, Drop bar entry gate
- Upper control box protection cover and tool tray in plastic ultra-solid
- AC power to platform 110 / 230 V
- Self-diagnosis tool on lower control box
- Swing out engine tray for ease of maintenance
- Hour meter
- Low fuel level indicator (upper & lower control boxes)
- Sound and light alarm for tilt and load
- 12 V battery
- Electric pump system and emergency descent
- Travel alarm
- Haulotte Activ'Shield™ Bar (for Europe and Latin America only)

[OPTIONS AND ACCESSORIES]

- Large modular basket 2.44 m x 0.91 m
- Lateral swing door entry gate
- Hydraulic generator Dynaset 3.5 Kw or 12 Kw
- Air-line to platform 6.5 mm inner diameter
- 55 W working light
- Power to platform 110 / 230 V (with or without circuit-breaker 30mA)
- Flashing light
- Cold weather kit : -10°C /-25°C
- Hot weather kit : hydraulic oil cooler + hydraulic oil
- Biodegradable hydraulic oil
- Non-marking tires
- Spark arrestor and electric one-way valve
- Welder + Welder support
- Haulotte Activ'Shield™ Bar (outside Europe and Latin America)