HINOWA LIGHTLIFT 20.10
SPIDER LIFT

APA
ACCESS PLATFORMS ABERDEEN

230KG
Lift Capacity
(2 pers 80x2 = 160kg
+ tool box 70kg)

20.15M
Working Height

9.70M
Horizontal Outreach

Hinowa




High-performance tracked spider lift with extended height and outreach, combining compact access with powerful up-and-over capability for complex environments.

[BENEFITS]

- Safe and performing

[TECHNICAL DATA]

WORKING HEIGHT	20.15 m
LIFT CAPACITY	230 kg (2 pers 80x2 + 160 kg + tool box 70 kg)
HORIZONTAL OUTREACH	9.70 m
UP AND OVER CLEARANCE	8.20 M
TOTAL LENGTH - WITHOUT BASKET	4.50 M
TOTAL LENGTH - WITH BASKET	5.01 M
HEIGHT IN TRAVEL POSITION	1.99 M
WIDTH WITH BASKET REMOVED	0.795 M
BASKET DIMENSIONS (H X L X W)	1.335 x 0.69 x 1.1 M
DIESEL ENGINE - BRAND	Kubota
DIESEL ENGINE - TYPE	Z602
PISTONS NO. AND DISPLACEMENT	Single-cylinder 599cm^3
MAX GROSS POWER	14.5 HP - 10.8kW @ 3200 rpm
ELECTRICAL START	12 volt
ELECTRIC MOTOR - STANDARD	230 V / 50 Hz - 2.2 kW
ELECTRIC MOTOR - OPTIONAL	110 V / 50 Hz - 2.2 kW

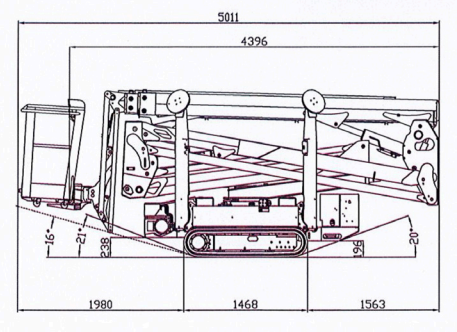

[STANDARD FEATURES]

- Automatic set up system
- Remote control
- GPRS-GPS
- R.A.H.M

[OPTIONS AND ACCESSORIES]

- Optional Kubota diesel engine
- Optional Honda petrol engine
- Optional electric motor