COMPACT 12 DX
DIESEL SCISSOR LIFT

APA
ACCESS PLATFORMS ABERDEEN

450KG
Lift Capacity

12.06M
Working Height

10.06M
Platform Height

Haulotte GROUP




Rough terrain diesel scissor lift delivering strong lift capacity, stability and traction for demanding outdoor construction and uneven ground conditions.

[BENEFITS]

- Outstanding rough terrain driving features
- 4 wheel drive
- Automatic differential lock
- Excellent gradeability (40%)
- Ground clearance of 27 cm
- Robust and easy to maintain
- Outriggers positioned within the machine footprint
- Durable and reliable upper control box
- Optimized accessibility to components
- Built-in diagnosis tool
- Exceptional productivity
- Full proportional controls
- Narrow turning radius
- One switch to deploy and retract 4 outriggers

[TECHNICAL DATA]

WORKING HEIGHT	12.06 m
PLATFORM HEIGHT	10.06 m
DRIVE HEIGHT	10.15 m
LIFT CAPACITY	450 kg
LIFT CAPACITY ON EXTENSION	
A LENGTH	3.17 m
B WIDTH	1.78 m
C HEIGHT - STOWED	2.56 m
D WHEELBASE	1.84 m
E GROUND CLEARANCE	28 cm
STORAGE HEIGHT	1.70 m
F PLATFORM LENGTH	2.45 m
EXTENDED PLATFORM LENGTH	3.70 m
PLATFORM EXTENSION LENGTH	1.20 m
RAISE/LOWER TIME	35/51 sec
NUMBER OF EXTENSIONS	1
TURNING RADIUS - OUTSIDE	3.50 m
DRIVE SPEED	0.8 - 5.5 km/h
GRADEABILITY	40 %
TYRES - FOAM FILLED	26x12-16.5
ENGINE	18.5 kW - 24.8 hp
HYDRAULIC CAPACITY	75 l
WEIGHT	4 110 kg

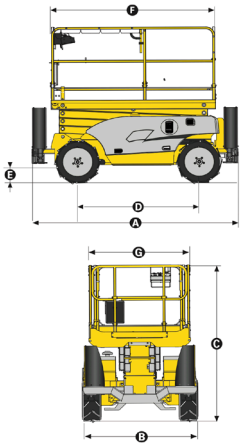

[STANDARD FEATURES]

- Kubota engine
- 4 wheel drive, 2 wheel steer
- 3° Tilt alarm
- 1.2m platform extension
- 12V - 74 Ah Batteries
- Removable operator's control box
- Brake release
- Hourmeter
- Towing hooks
- Hydraulic brakes
- Manual platform lowering valve
- Foam filled all terrain tyres
- Automatic levelling outriggers
- Side shields
- Horn
- Lanyard attachment points

[OPTIONS AND ACCESSORIES]

- Non marking tyres
- Rotating beacon
- 110 V power to the platform
- Travel alarm
- Motion alarm for movements and translation
- Working light
- Biodegradable oil
- Cold Weather Package
- Swing-door gate
- Foldable guard-rails
- Hydraulic generator 3.5 kW
- Hydraulic generator 3.5 kW