COMPACT 10
ELECTRIC SCISSOR LIFT

APA
ACCESS PLATFORMS ABERDEEN

450KG
Lift Capacity

10.00M
Working Height

8.00M
Platform Height

Haulotte GROUP




High-capacity electric scissor lift delivering extended indoor height, smooth control and reliable performance for demanding internal tasks.

[BENEFITS]

- Impact-proof counterweight with integrated ladder protection, AC motors and charger plug
- Reinforced guardrails with additional vertical stile for maximum durability
- Maximised potential
- Access all worksites: foldable guardrails, lateral and longitudinal forklift pockets
- IN/OUT usage with full height driving and no load restriction
- Proportional movements for precise driving (AC motors)
- Ergonomic upper control box with grab handle & speed selector
- Haulotte Activ'Energy Management for battery care
- On-board & remote settings and diagnostic tools with Haulotte Diag, Haulotte Activ'Screen and Sherpal telematics solution

[TECHNICAL DATA]

WORKING HEIGHT	10 m
PLATFORM HEIGHT	8 m
DRIVE HEIGHT	8 m
LIFT CAPACITY - OUTSIDE	450 kg (1 pers.)
LIFT CAPACITY - INSIDE	450 kg (3 pers.)
LIFT CAPACITY ON EXTENSION	120 kg
A PLATFORM LENGTH	2.40 m
B PLATFORM LENGTH - EXTENDED	3.32 m
LENGHT - EXTENSION	0.92 m
C PLATFORM WIDTH - OUTSIDE	1.17 m
D STOWED HEIGHT	2.35 m
HEIGHT - GUARDRAILS LOWERED	1.65 m
E OVERALL WIDTH	1.20 m
F LENGTH	2.50 m
G WHEELBASE	1.86 m
H GROUND CLEARANCE - CENTRE	12.50 cm
GROUND CLEARANCE - DEPLOYED POTHOLES	2 cm
TURNING RADIUS - OUTSIDE	1.83 m
TILT (LONGITUDINAL/LATERAL)	3.5° / 1.5°
DRIVE SPEED	0.7 / 1.5 / 4.2 km/h
GRADEABILITY	25 %
TYRES - NON MARKING	15 x 5
BATTERIES	24 V - 225 Ah (C20)
HYDRAULIC CAPACITY	10 l
WEIGHT	2 490 kg

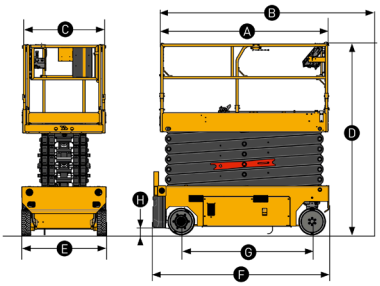

[STANDARD FEATURES]

- Haulotte Activ'Energy Management: Smart CAN charger
- 27A multivoltage charger
- Battery access with swing out tray
- Battery level indicator
- Haulotte Activ'Screen (battery charge information, hourmeter, service alerts and failures in code or in text)
- Lateral and longitudinal forklift pockets
- Foldable guardrails
- Front platform extension
- AC motors
- Mobile upper control box
- 2 drive speeds selector
- Manual emergency descent
- Mobile pothole guards
- MyHaulotte multi-services portal access
- 2 front steering wheels, 2 rear drive wheels
- Solid non marking tires
- Motion alarm
- Electric brake release system
- Drop bar entry

[OPTIONS AND ACCESSORIES]

- Haulotte Activ'Energy Management: automatic or manual battery water filling systems
- AGM maintenance-free batteries
- Secondary guarding system
- Telematics solutions
- Pipe cradle
- Panel carrier
- Swing gate entry
- Additional protection of upper and lower control box
- Basket plug (110 / 230 V)
- Working light
- Flashing light (single, dual or 360°)
- Biodegradable hydraulic oil
- Cold weather hydraulic oil