

COMPACT 12 ELECTRIC SCISSOR LIFT

APA
ACCESS PLATFORMS ABERDEEN

320KG

Lift Capacity

11.75M

Working Height

9.75M

Platform Height

Haulotte 
GROUP



Electric scissor lift providing higher indoor access with strong capacity, smooth control and efficient performance across repetitive tasks.

[BENEFITS]


- Smart rugged design
- Impact-proof counterweight with integrated ladder protection, AC motors and charger plug
- Reinforced guardrails with additional vertical stile for maximum durability
- Maximised potential
- Access all worksites: foldable guardrails, lateral & longitudinal forklift pockets
- IN/OUT usage with full height driving and no load restriction
- Unique user experience
- Proportional movements for precise driving (AC motors)
- Ergonomic upper control box with grab handle & speed selector
- Unbeatable serviceability
- Haulotte Activ'Energy Management for battery care
- On-board & remote settings and diagnostic tools with Haulotte Diag, Haulotte Activ'Screen and Sherpal telematics solution

KEEPING SCOTLAND SAFE AT HEIGHT

[ACCESSABERDEEN.CO.UK](https://accessaberdeen.co.uk)

[TECHNICAL DATA]

WORKING HEIGHT	11.75 m
PLATFORM HEIGHT	9.75 m
DRIVE HEIGHT	9.75 m
LIFT CAPACITY - OUTSIDE	320 kg (1 pers.)
LIFT CAPACITY - INSIDE	320 kg (3 pers.)
LIFT CAPACITY ON EXTENSION	120 kg
A PLATFORM LENGTH	2.40 m
B PLATFORM LENGTH - EXTENDED	3.32 m
LENGHT - EXTENSION	0.92 m
C PLATFORM WIDTH - OUTSIDE	1.17 m
D STOWED HEIGHT	2.47 m
HEIGHT - GUARDRAILS LOWERED	1.77 m
E OVERALL WIDTH	1.20 m
F LENGTH	2.50 m
G WHEELBASE	1.86 m
H GROUND CLEARANCE - CENTRE	12.50 cm
GROUND CLEARANCE - DEPLOYED POTHOLES	2 cm
TURNING RADIUS - OUTSIDE	1.83 m
TILT (LONGITUDINAL/LATERAL)	3.5° / 1.5°
DRIVE SPEED	0.7 / 1.5 / 4.2 km/h
GRADEABILITY	25 %
TYRES - NON MARKING	15 x 5
BATTERIES	24 V - 225 Ah (C20)
HYDRAULIC CAPACITY	14 l
WEIGHT	2 940 kg

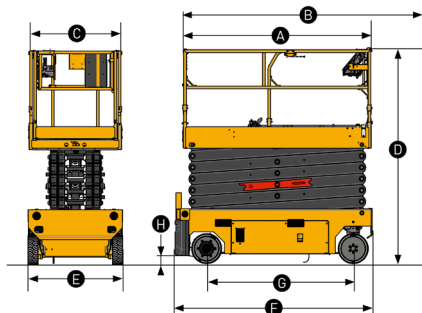

[STANDARD FEATURES]

- Haulotte Activ'Energy Management: Smart CAN charger
- 27A multivoltage charger
- Battery access with swing out tray
- Battery level indicator
- Haulotte Activ'Screen (battery charge information, hourmeter, service alerts and failures in code or in text)
- Lateral and longitudinal forklift pockets
- Foldable guardrails
- Front platform extension
- AC motors
- Mobile upper control box
- 2 drive speeds selector
- Manual emergency descent
- Mobile pothole guards
- MyHaulotte multi-services portal access
- 2 front steering wheels, 2 rear drive wheels
- Solid non marking tires
- Motion alarm
- Electric brake release system
- Drop bar entry

[OPTIONS AND ACCESSORIES]

- Haulotte Activ'Energy Management: automatic or manual battery water filling systems
- AGM maintenance-free batteries
- Secondary guarding system
- Telematics solutions
- Pipe cradle
- Panel carrier
- Swing gate entry
- Additional protection of upper and lower control box
- Basket plug (110 / 230 V)
- Working light
- Flashing light (single, dual or 360°)
- Biodegradable hydraulic oil
- Cold weather hydraulic oil