COMPACT 14
ELECTRIC SCISSOR LIFT

APA
ACCESS PLATFORMS ABERDEEN

320KG
Lift Capacity

13.75M
Working Height

11.75M
Platform Height

Haulotte GROUP




High-reach electric scissor lift delivering maximum indoor height with stable, controlled performance for demanding internal projects.

[BENEFITS]

- Standard rugged design
- Impact-proof counterweight with integrated ladder protection, AC motors and charger plug
- Reinforced guardrails with additional vertical stile for maximum durability
- Maximised potential
- Access all worksites: foldable guardrails, lateral & longitudinal forklift pockets
- Indoor usage with full height driving and no load restriction
- Unique user experience
- Proportional movements for precise driving (AC motors)
- Ergonomic upper control box with grab handle & speed selector
- Unbeatable serviceability
- Haulotte Activ'Energy Management for battery care
- On-board & remote settings and diagnostic tools with Haulotte Diag, Haulotte Activ'Screen and Sherpal telematics solution

[TECHNICAL DATA]

WORKING HEIGHT	13.75 m
PLATFORM HEIGHT	11.75 m
DRIVE HEIGHT	11.75 m
LIFT CAPACITY - OUTSIDE	N/A
LIFT CAPACITY - INSIDE	320 kg (3 pers)
LIFT CAPACITY ON EXTENSION	120 kg
A PLATFORM LENGTH	2.40 m
B PLATFORM LENGTH - EXTENDED	3.32 m
LENGHT - EXTENSION	0.92 m
C PLATFORM WIDTH - OUTSIDE	1.17 m
D STOWED HEIGHT	2.72 m
HEIGHT - GUARDRAILS LOWERED	2.02 m
E OVERALL WIDTH	1.20 m
F LENGTH	2.50 m
G WHEELBASE	1.86 m
H GROUND CLEARANCE - CENTRE	12.50 cm
GROUND CLEARANCE - DEPLOYED POTHOLES	2 cm
TURNING RADIUS - OUTSIDE	1.83 m
TILT (LONGITUDINAL/LATERAL)	3.5° / 1.5°
DRIVE SPEED	0.7 / 1.5 / 4.2 km/h
GRADEABILITY	25 %
TYRES - NON MARKING	15 x 5
BATTERIES	24 V - 225 Ah (C20)
HYDRAULIC CAPACITY	14 l
WEIGHT	3 070 kg

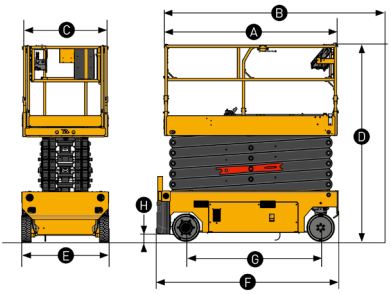

[STANDARD FEATURES]

- Haulotte Activ'Energy Management: Smart CAN charger
- 27A multivoltage charger
- Battery access with swing out tray
- Battery level indicator
- Haulotte Activ'Screen (battery charge information, hourmeter, service alerts and failures in code or in text)
- Lateral and longitudinal forklift pockets
- Foldable guardrails
- Front platform extension
- AC motors
- Mobile upper control box
- 2 drive speeds selector
- Manual emergency descent
- Mobile pothole guards
- MyHaulotte multi-services portal access
- 2 front steering wheels, 2 rear drive wheels
- Solid non marking tires
- Motion alarm
- Electric brake release system
- Drop bar entry

[OPTIONS AND ACCESSORIES]

- Haulotte Activ'Energy Management: automatic or manual battery water filling systems
- AGM maintenance-free batteries
- Secondary guarding system
- Telematics solutions
- Pipe cradle
- Panel carrier
- Swing gate entry
- Additional protection of upper and lower control box
- Basket plug (110 / 230 V)
- Working light
- Flashing light (single, dual or 360°)
- Biodegradable hydraulic oil
- Cold weather hydraulic oil