HA12 CJ+
ELECTRIC BOOM LIFT

APA
ACCESS PLATFORMS ABERDEEN

230KG
Lift Capacity

11.68M
Working Height

7.22M
Horizontal Outreach

Haulotte GROUP




Compact electric boom lift delivering clean, quiet performance with precise control for indoor and restricted access environments.

[BENEFITS]

- Excellent manoeuvrability in the tightest spaces
- Drive and turntable rotation
- Tight turning radius
- Zero tailswing
- Compact stowed height passes through standard doorways
- 1.20 m width
- Optimized productivity
- Proportional and simultaneous movements
- Suitable for inside and outside use
- Long working cycles

[TECHNICAL DATA]

WORKING HEIGHT	11.68 m
PLATFORM HEIGHT	9.68 m
HORIZONTAL OUTREACH	7.22 m
UP AND OVER CLEARANCE	4.74 m
LIFT CAPACITY	230 kg
A LENGTH	5.64 m
B WIDTH	1.20 m
C HEIGHT - STOWED	1.99 m
D WHEELBASE	1.65 m
E GROUND CLEARANCE	10.70 cm
F X G PLATFORM SIZE	1.14 x 0.80 m
H LENGTH - TRANSPORT	4.20 m
J HEIGHT - TRANSPORT	2.60 m
TAILSWING	0 cm
HORIZONTAL JIB ROTATION	180° (-90°/+90°)
VERTICAL JIB ROTATION	132.2° (+63,5°/-68,7°)
PLATFORM ROTATION	180° (-90°/+90°)
TURNTABLE ROTATION	355°
TURNING RADIUS - OUTSIDE	3.65 m
TILT	3°
PROPORTIONAL DRIVE SPEED	0.68 - 6 km/h
GRADEABILITY	25 %
TYRES - NON MARKING	598x190
ENERGY	48 V - 320 Amph (C5)
WEIGHT	7 110 kg

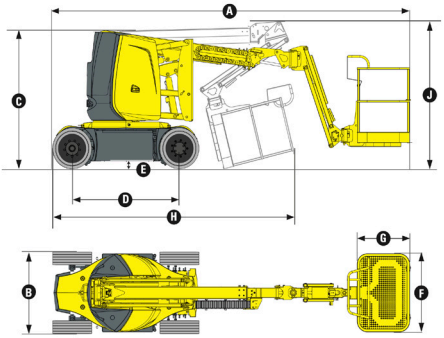

[STANDARD FEATURES]

- Ergonomic control panels
- Battery charge indicators on both control panels
- Automatic platform levelling
- Solid non-marking tyres
- 2 wheel drive
- 2 wheel steer
- Deep cycle batteries
- On board battery charger 48 V - 50A
- Safe to use in winds up to 45 km/h
- Towing hooks and lifting eyes
- Tilt sensor
- Load Management System in the platform
- Horn
- Hourmeter
- Mechanical turret slewing lock
- Emergency hand pump

[OPTIONS AND ACCESSORIES]

- Traction batteries
- Auxiliary power in the platform for emergency descent
- Air line to platform
- Fluorescent tube caddy
- Orange safety cones holder
- Self-closing swing door
- Flashing light
- Working light
- Electric socket in the platform
- Circuit-breaker