HA15 IP
ELECTRIC BOOM LIFT

APA
ACCESS PLATFORMS ABERDEEN

230KG
Lift Capacity

14.87M
Working Height

8.65M
Horizontal Outreach

Haulotte GROUP




Electric boom lift delivering extended indoor reach with smooth control and efficient performance in confined working environments.

[BENEFITS]

- Excellent manoeuvrability in the tightest spaces
- Compact size with 1.5 m width
- 2 m stowed height can pass through a standard doorway
- 130° (+65°/-65°) fly jib range of motion
- Tight turning radius (3.9 m)
- Optimal productivity and comfort
- 8.65 m outreach
- Long working cycles
- Full proportional controls
- Robust, reliable and easy to maintain

[TECHNICAL DATA]

WORKING HEIGHT	14.87 m
PLATFORM HEIGHT	12.87 m
HORIZONTAL OUTREACH	8.65 m
UP AND OVER CLEARANCE	6.25 m
LIFT CAPACITY	230 kg
A LENGTH	6.65 m
B WIDTH	1.52 m
C HEIGHT - STOWED	2.10 m
HEIGHT - TRANSPORT	3.02 m
D WHEELBASE	2 m
E GROUND CLEARANCE	14 cm
F X G PLATFORM SIZE	1.15 x 1.07 m
TAILSWING	0 cm
VERTICAL JIB ROTATION	130° (+65°/-65°)
PLATFORM ROTATION	180° (+90°/-90°)
TURNTABLE ROTATION	355°
TURNING RADIUS - OUTSIDE	3.95 m
PROPORTIONAL DRIVE SPEED	0.7 - 4.5 km/h
GRADEABILITY	25 %
TYRES - NON MARKING	23x10-12
ENERGY	48 V - 345 Amph (C5)
HYDRAULIC CAPACITY	30 l
WEIGHT	7 230 kg

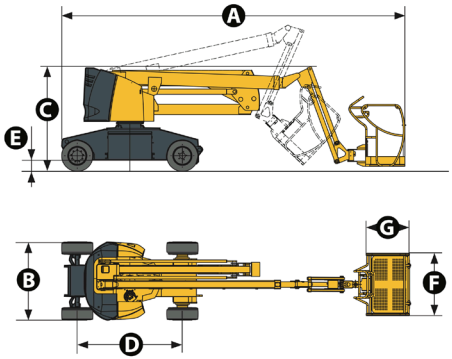

[STANDARD FEATURES]

- Semi-traction battery
- Battery charge indicator
- 48 V – 50 A battery charger
- Sensitive control box
- 3° Tilt alarm
- Non marking tyres
- Outside / inside use: wind rated to 45 km/h
- Brake release
- Hourmeter
- Slewing block pin
- Towing hooks and lifting eyes
- Emergency hand pump
- 2 wheel drive and steer
- Load limiter in cage
- Horn

[OPTIONS AND ACCESSORIES]

- Flashing light
- Power to platform
- Travel alarm
- Centralised battery filling
- 360 Ah traction batteries
- Waterproof batteries
- Air line to cage
- Electric remote brake release
- Biodegradable oil
- Large basket option (1.5 m x 0.8 m)